

INLET OUTLET CONNECTIONS: -  
 RP 1 1/4 / 32 (1 1/4 B.S.P. INTERNAL)

T&PR VALVE CONNECTIONS: -  
 RP 3/4 / 20 (3/4 B.S.P. FEMALE)

GAS INLET CONNECTION: -  
 RP 1/2 / 15 (1/2 B.S.P. FEMALE)


T&PR VALVE SETTING: -  
 1000 kPa

**NOTES:**

N1. MINIMUM SPACE BETWEEN WALL AND BACK OF WATER HEATER IS 100mm.

N2. A MINIMUM OF 900mm SHOULD BE LEFT IN FRONT OF THE WATER HEATER FOR ACCESS, SERVICING AND WATER HEATER REMOVAL.

- LEGEND**
- ⊞ STOP COCK
  - ⊞ NON RETURN VALVE
  - ⊞ PRESSURE LIMITING VALVE (IF REQUIRED)
  - ⊞ COLD WATER RELIEF VALVE
  - ⊞ GATE VALVE
  - ⊞ CIRCULATOR
  - ⊞ FIXTURES
  - ➔ DIRECTION OF FLOW
  - ⊞ UNION
  - ⊞ TUNDISH

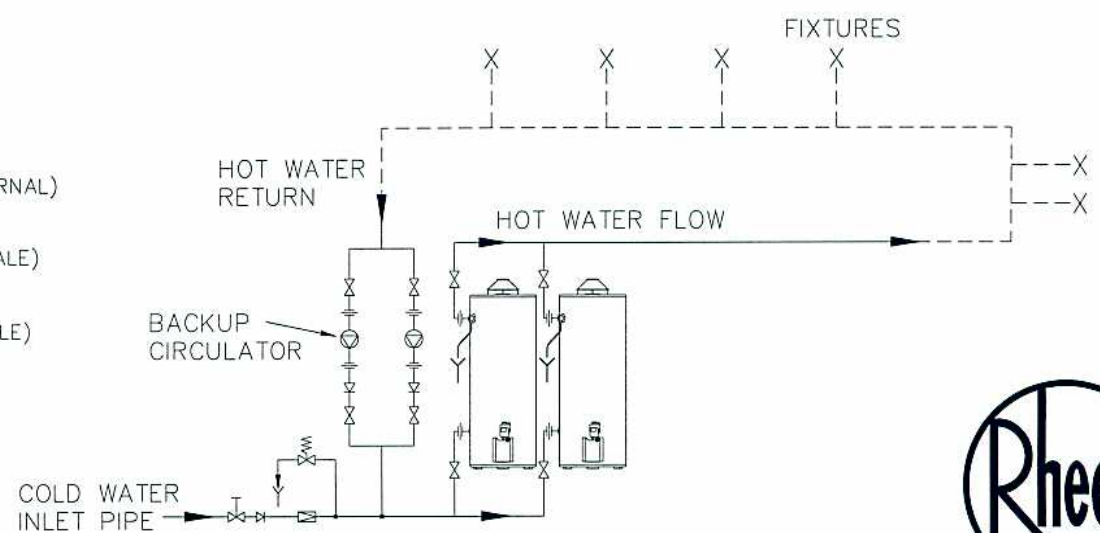

**RHEEM WATER HEATERS HEAVY DUTY GAS 2 x 620260**