


LEGEND

- ⊥ STOP COCK
- ⊗ NON RETURN VALVE
- ⊠ PRESSURE LIMITING VALVE (IF REQUIRED)
- ⊞ COLD WATER RELIEF VALVE
- ⊘ GATE VALVE
- ⊙ CIRCULATOR
- ⊗ FIXTURES
- DIRECTION OF FLOW
- || UNION
- Y TUNDISH

- INLET OUTLET CONNECTIONS: -**
 RP 1 1/4 / 32 (1 1/4 B.S.P. INTERNAL)
- T&PR VALVE CONNECTIONS: -**
 RP 3/4/20 (3/4 B.S.P. FEMALE)
- GAS INLET CONNECTION: -**
 RP 1/2/15 (1/2 B.S.P. FEMALE)
- T&PR VALVE SETTING: -**
 1000 kPa

NOTES:

- N1. MINIMUM SPACE BETWEEN WALL AND BACK OF WATER HEATER IS 100mm.
- N2. A MINIMUM OF 900mm SHOULD BE LEFT IN FRONT OF THE WATER HEATER FOR ACCESS, SERVICING AND WATER HEATER REMOVAL.

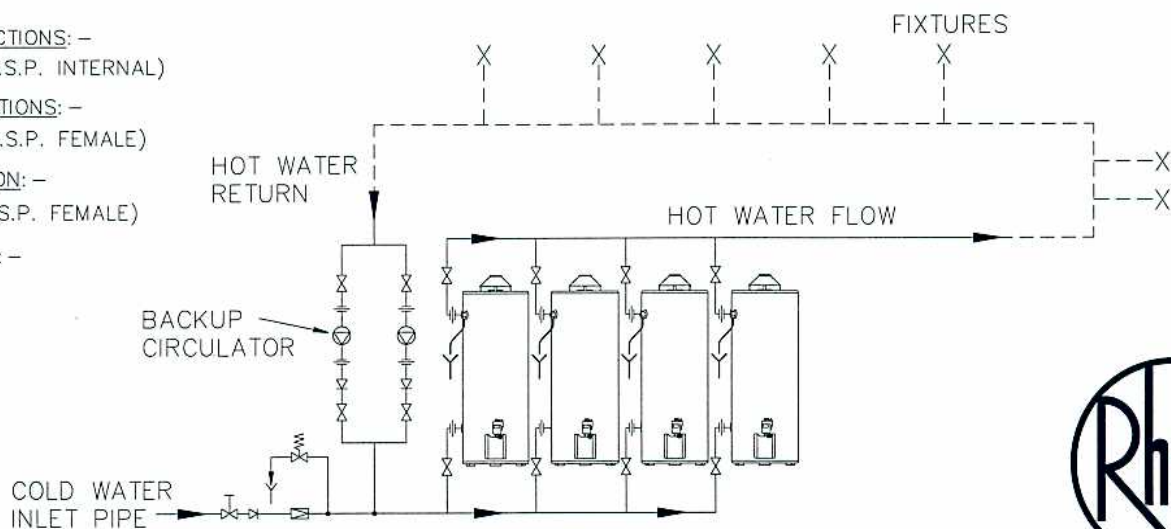

RHEEM WATER HEATERS HEAVY DUTY GAS 4 x 620260

