



# RHEEM STELLAR® – 5 STAR GAS STORAGE



GAS



5 STAR RATING

2 - 6

PEOPLE

330 L or 360 L

FIRST HOUR CAPACITY

10 YEAR

WARRANTY<sup>1</sup>



## FEATURES

- **5 Star energy efficiency** – uses less gas than 3 or 4 Star water heaters, lowering greenhouse gas emissions
- **Advanced technology** – the Stellar Superflue® increases both efficiency and performance, reducing energy consumption and saving you money
- **Mains pressure at multiple taps** – to service multiple hot water demands at once
- **200 litre per hour recovery** – more than you will likely need!
- 10 year warranty<sup>1</sup>
- Designed for durability
- Australian made

## WHY CHOOSE RHEEM GAS STORAGE HOT WATER?

- Designed for Australia's tough conditions, using 70 years of experience
- Capacities to suit different family sizes and hot water requirements
- Fast hot water recovery
- Mains Pressure water delivery for steady, hot and strong® hot water
- Full technical support through Rheem's National Service Network
- Available to suit Natural Gas or Propane



INSTALL A RHEEM®





# RHEEM STELLAR® – 5 STAR GAS STORAGE

## 5 STAR ENERGY EFFICIENCY


A 5 star energy efficiency rating, 10 year warranty<sup>1</sup> and sleek styling make Rheem Stellar Rheemarkable!

Rheem Stellar offers premium efficiency and durability, thanks to the ingenious Stellar SuperFlue® – saving you both energy and money.

Rheem Stellar is the first Australian made water heater to achieve 89% thermal efficiency. With its 5 Star energy rating and innovative design, your choice of water heater just got a lot easier.

## ADVANCED TECHNOLOGY

The Rheem Stellar SuperFlue® increases both efficiency and performance by absorbing more energy from the flue gases whilst resisting against the corrosive effects of heat and condensation – reducing energy consumption and saving you money.

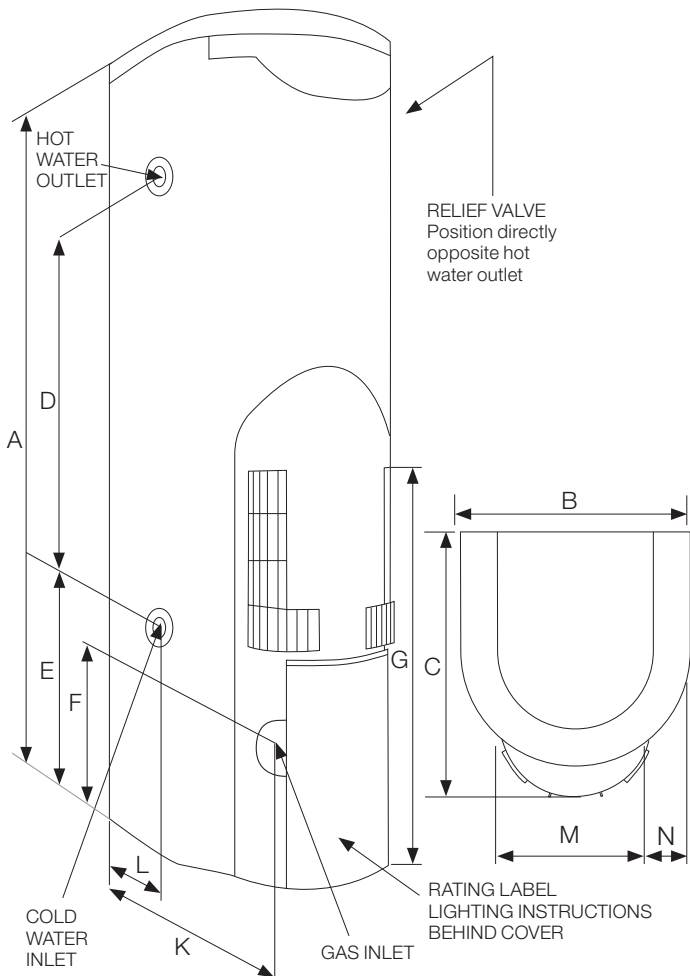

MODEL <sup>2</sup>	850330	850360
--------------------	--------	--------

Storage Capacity	Litres	130	160
Recovery Rate @ 45°C Rise	L/hr	200	200
First Hour Capacity <sup>3</sup>	Litres	330	360

Hourly Gas Consumption			
Natural Gas	MJ	42	42
Propane	MJ	42	42
Butane	MJ	39	39
Approx. Weight Empty	kg	70	80
Approx. Weight Full	kg	200	240
Relief Valve Setting	kPa	1400	1400
Expansion Control Valve Setting	kPa	1200	1200

Max. Supply Pressure			
without ECV	kPa	1120	1120
with ECV <sup>4</sup>	kPa	960	960

Water Connection LHS	RP $\frac{3}{4}$ /20	RP $\frac{3}{4}$ /20
Gas Connection	RP $\frac{1}{2}$ /15	RP $\frac{1}{2}$ /15
AGA GAS Energy Rating	5 Stars	5 Stars
Suitable for No. of People	2-5 <sup>†</sup>	3-6 <sup>†</sup>

Dimensions			
A (Height)	mm	1600	1900
B (Width)	mm	485	485
C (Depth)	mm	558	558
D	mm	988	1213
E	mm	328	409
F	mm	298	298
G	mm	770	770
K	mm	520	520
L	mm	252	252
M	mm	299	299
N	mm	93	93

### <sup>1</sup> Warranty Conditions.

10 years Cylinder and SuperFlue warranty, 5 years labour on Cylinder and SuperFlue, 1 year parts & labour warranty on all other components. For Domestic (non-commercial) installations.

<sup>2</sup> Model numbers: N=Natural, P=Propane, B=Butane, Letter N, P, or B is included in the model number, eg 850360N0, to denote gas type.

<sup>3</sup> First hour capacity is the storage capacity plus nominal first hour recovery rate at 45°C temperature rise using Natural Gas.

<sup>4</sup> ECV not supplied.

<sup>†</sup> Guide only, subject to individual hot water consumption patterns. Materials and data are subject to change without notice.

<sup>®</sup> Registered Trademark of Rheem Australia Pty Ltd.

<sup>™</sup> Trademark of Rheem Australia Pty Ltd.



The Australian Gas Association



Quality ISO 9001



AS 3498  
WMKA00153

### Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia  
PO Box 6, Rydalmere, New South Wales 2116, Australia

