

Rheem Electric Stellar[®] SS 250L

4A1250, 4A2250

3 - 5

PEOPLE


Indoor/
Outdoor

INSTALLATION



Features & Benefits

- Stainless steel cylinder and water fittings resist corrosion for longer, extending product life
- Dual handed fittings located on the front of the water heater
- Twin element model- 4A2250
- 19% better performance than MEPS reduces energy use, saving money
- Up to 42% lighter² - for easier handling and installation
- Australian made
- 12 year cylinder warranty¹

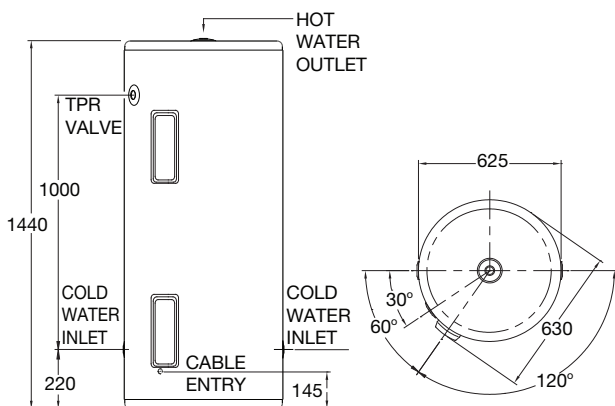

MODEL	4A1250 4A2250
Hot Water Delivery (L)	250
kW Rating	3.6, 4.8
Relief Valve Pressure (kPa)	1000
Expansion Control Valve (kPa)	850
Max Water Supply Pressure:	
with ECV (kPa)	680
without ECV (kPa)	800
Water Connections	Rp ³ / ₄
Approx. Weight (packaged) kg	45



Scan code for
details & installation
instructions

