




TOTAL CAPACITY	920L
CAPACITY ABOVE UPPER FLANGE	297L
CAPACITY ABOVE LOWER FLANGE	758L
INLET / OUTLET CONNECTIONS	ISO 7.1 - RP 2"
SENSOR CONNECTIONS	ISO 7.1 - RP 1/2"
T&PR CONNECTION	NPT 1 1/4"
T&PR VALVE SETTING	860kPa (125 PSI)
MAX WORKING PRESSURE	900kPa
MAX SUPPLY PRESSURE	690kPa
TEST PRESSURE	1350kPa
APPROXIMATE WEIGHT	136 kg
INSULATION CLADDING	ALU or PVC /ABS TOP

Drain connection
ISO 7.1 - RP1 1/4"

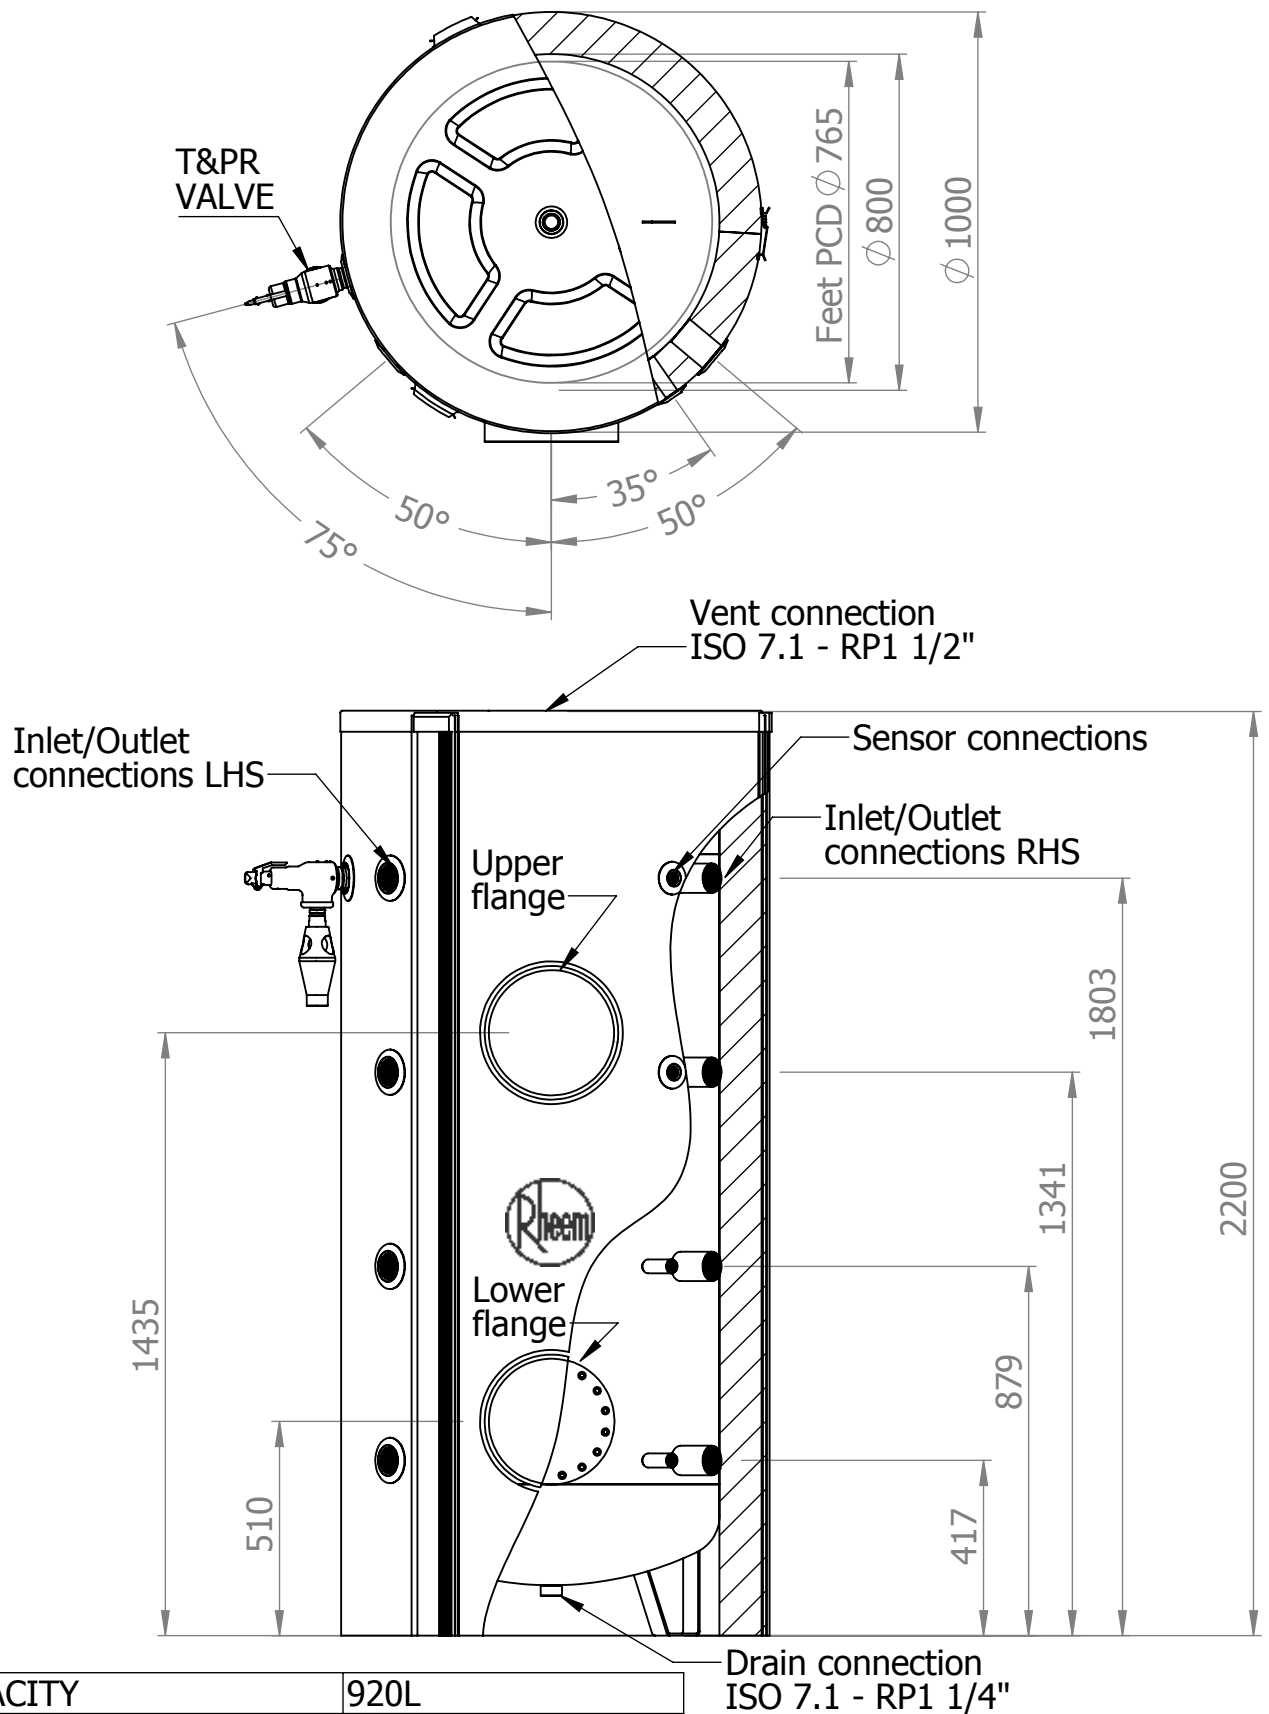

COMMERCIAL
STORAGE CYLINDER
RT1000N9ALU/RT1000N9PVC