




TOTAL CAPACITY	5180L
CAPACITY ABOVE UPPER FLANGE	1543L
CAPACITY ABOVE LOWER FLANGE	4274L
INLET / OUTLET CONNECTIONS	ISO 7.1 - RP 2"
SENSOR CONNECTIONS	ISO 7.1 - RP 1/2"
T&PR CONNECTION	NPT 1 1/4"
T&PR VALVE SETTING	860kPa (125 PSI)
MAX WORKING PRESSURE	900kPa
MAX SUPPLY PRESSURE	690kPa
TEST PRESSURE	1350kPa
APPROXIMATE WEIGHT	664 Kg
INSULATION CLADDING	ALU or PVC /ABS TOP

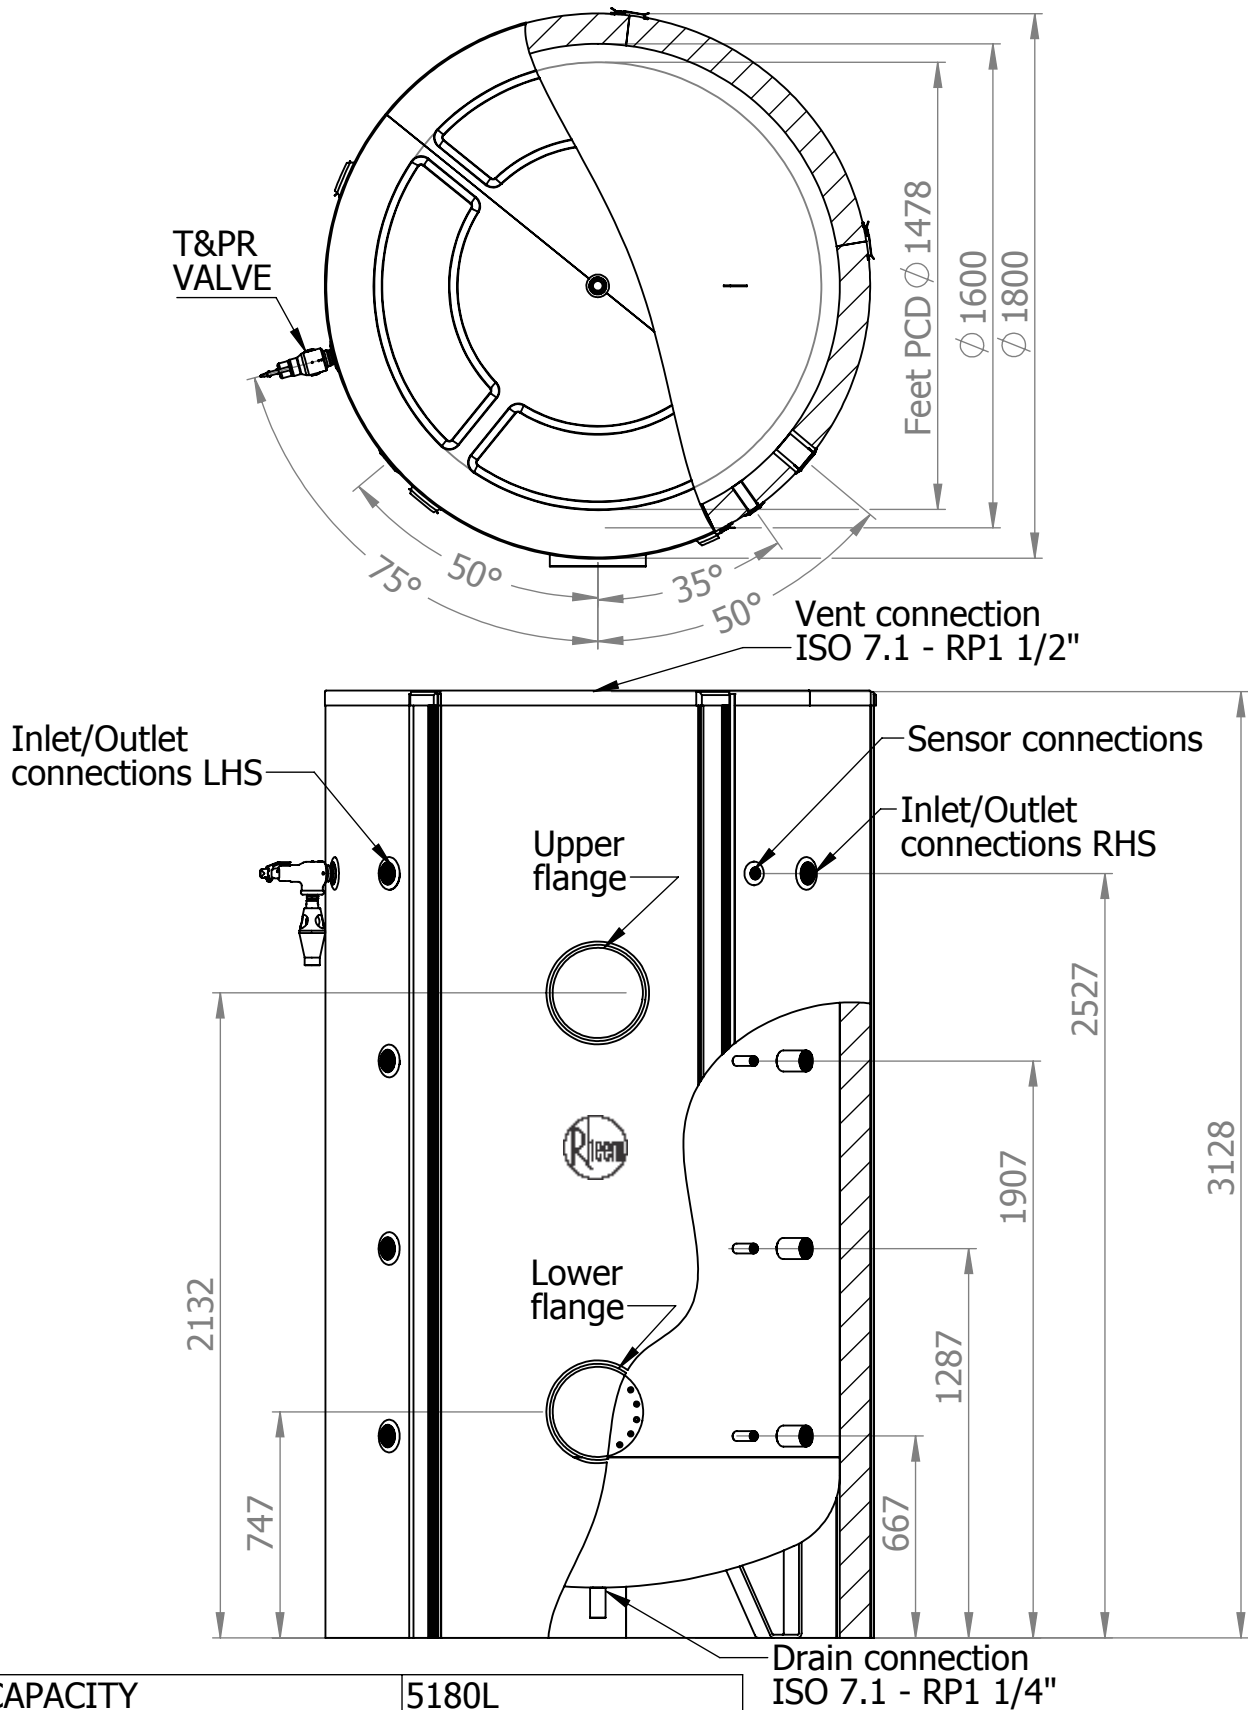

**COMMERCIAL
STORAGE CYLINDER**
RT5000N9ALU/RT5000N9PVC