


**LEGEND**

- STOP COCK
- NON RETURN VALVE
- PRESSURE LIMITING VALVE (IF REQUIRED)
- COLD WATER RELIEF VALVE
- GATE VALVE
- CIRCULATOR
- FIXTURES
- DIRECTION OF FLOW
- UNION
- TUNDISH

**NOTES:**

- N1. MINIMUM SPACE BETWEEN WALL AND BACK OF WATER HEATER IS 100mm.
- N2. A MINIMUM OF 900mm SHOULD BE LEFT IN FRONT OF THE WATER HEATER FOR ACCESS, SERVICING AND WATER HEATER REMOVAL.

- INLET OUTLET CONNECTIONS: -**  
 RP 1 1/4 / 32 (1 1/4 B.S.P. INTERNAL)
- T&PR VALVE CONNECTIONS: -**  
 RP 3/4 / 20 (3/4 B.S.P. FEMALE)
- GAS INLET CONNECTION: -**  
 RP 1/2 / 15 (1/2 B.S.P. FEMALE)
- T&PR VALVE SETTING: -**  
 1000 kPa

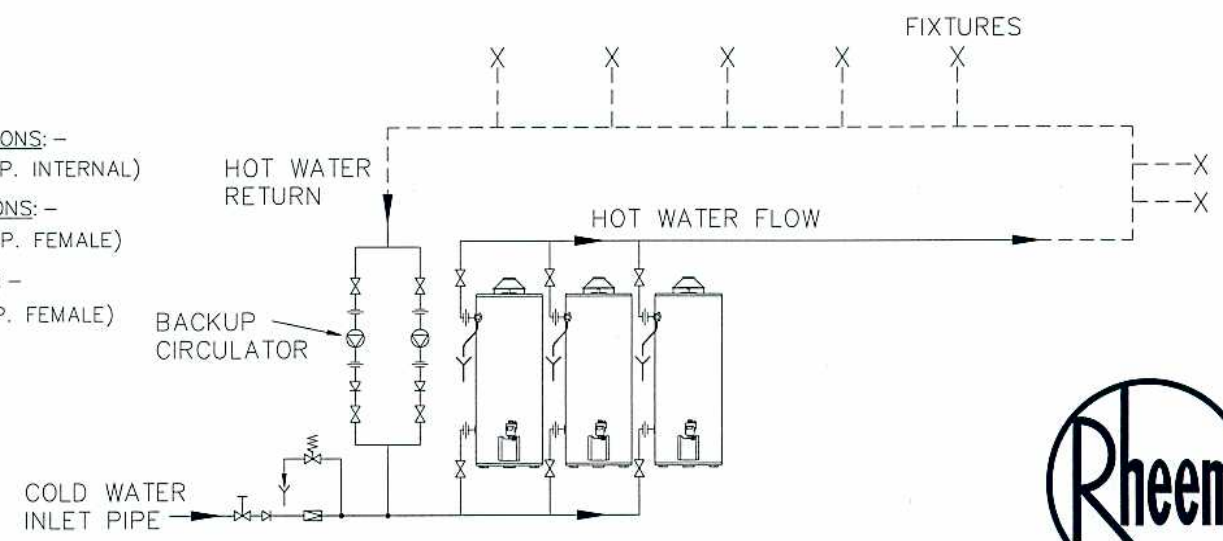

**RHEEM WATER HEATERS HEAVY DUTY GAS 3 x 620260**

