

- LEGEND**
- STOP COCK
  - NON RETURN VALVE
  - PRESSURE LIMITING VALVE (IF REQUIRED)
  - COLD WATER RELIEF VALVE
  - GATE VALVE
  - CIRCULATOR
  - FIXTURES
  - DIRECTION OF FLOW
  - UNION
  - TUNDISH

**INLET OUTLET CONNECTIONS: -**  
 RP 1 1/4 / 32 (1 1/4 B.S.P. INTERNAL)

**T&PR VALVE CONNECTIONS: -**  
 RP 3/4 / 20 (3/4 B.S.P. FEMALE)


**GAS INLET CONNECTION: -**  
 RP 1/2 / 15 (1/2 B.S.P. FEMALE)

**T&PR VALVE SETTING: -**  
 1000 kPa

**NOTES:**

N1. MINIMUM SPACE BETWEEN WALL AND BACK OF WATER HEATER IS 100mm.

N2. A MINIMUM OF 900mm SHOULD BE LEFT IN FRONT OF THE WATER HEATER FOR ACCESS, SERVICING AND WATER HEATER REMOVAL.

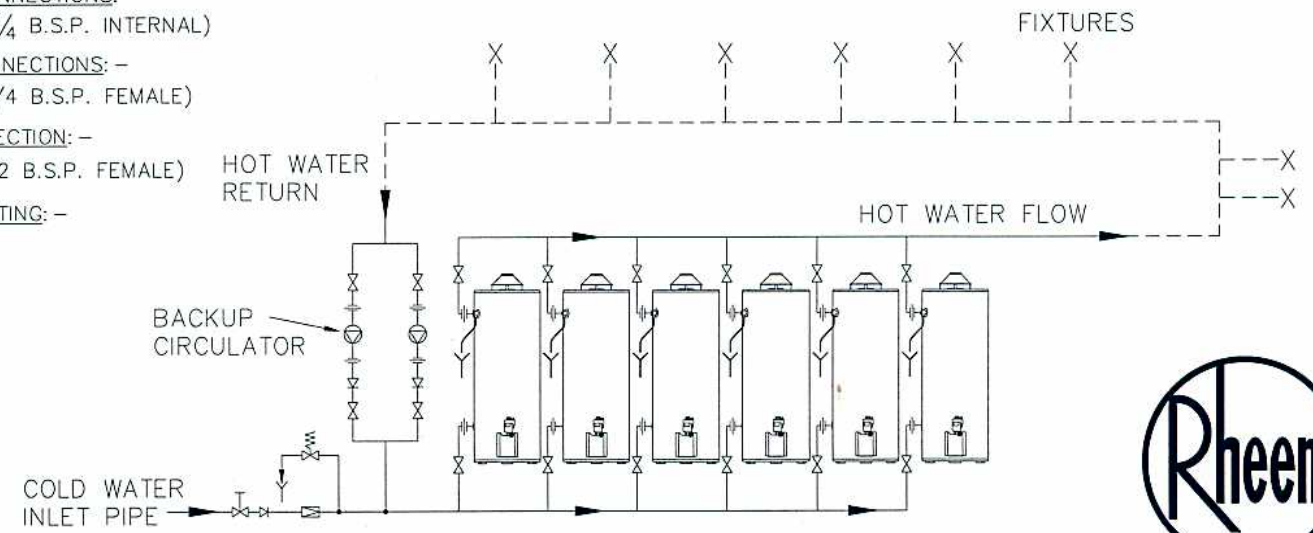

**RHEEM WATER HEATERS HEAVY DUTY GAS 6 x 620260**



620260x6 5/01 REV-AD (A3)