BOILING WATER LAZER® ECO

SUITED TO SMALL OFFICE KITCHENS AND SITE SHEDS

ELECTRIC | ECONOMICAL | UP TO 50 CUPS[1] INSTANTLY | ECO MODE

High flow boiling water units for commercial applications.

LOW FUSS

Delivers up to 50 cups[1] instantly, with recovery of up to 123 cups[1] per hour; an in-built indicator shows red when heating and green when in energy conservation mode.

ENERGY MANAGEMENT OPTIONS

One-touch activation button for Eco Mode, automatically turns the Lazer® Eco off after two hours with no use. Electronic temperature sensors allow staged filling, more reliable than cistern-valve models and boiling point is automatically calibrated to installation altitude.

MORE KEY FEATURES

- Available in 3, 5 and 7.5 litre
- White enamel

TANK 5 YEAR WARRANTY

PARTS & LABOUR 2 YEAR WARRANTY

Lead Free
AS 3498
Lic WMKA00177

*Conditions apply: For full terms and conditions please contact Rheem or visit www.rheem.com.au/rheem/help/Warranties

BOILING WATER LAZER® COMMERCIAL

SUITED TO COMMERCIAL KITCHENS, SPORTING CLUBS AND LARGE WORKPLACES

ELECTRIC | FAST FILLING | UP TO 247 CUPS[1] INSTANTLY | ECO MODE | ROBUST CONSTRUCTION

The high-flow, high-capacity, boiling water unit.

HIGH FLOW

High flow tap saves time with up to 35% faster filling compared to other like-for-like units[3].

HIGH CAPACITY

Fill pots as well as cups: delivers up to 247 cups[1] as fast as it can be drawn with a recovery of between 135 and 265 cups[1] per hour.

ENERGY MANAGEMENT OPTIONS

The user interface allows people to easily adjust temperatures. While a seven-day programmable timer, turns energy off when boiling water isn't needed.

Sleep mode turns off the system automatically when it hasn't been used for two hours. Electronic temperature sensors allow staged filling, more reliable than cistern-valve models and boiling point is automatically calibrated to installation altitude.

ROBUST MANUFACTURE

All ranges come with copper tanks, a high water supply pressure rating (1000kPa) and optional filter kit for water protection and improved water taste. There are also automatic safety devices to safeguard the unit against boiling dry.

MORE KEY FEATURES

- Available in 7.5, 10, 15, 25 and 40 litre
- White enamel or stainless outer jacket

Lead Free
AS 3498
Lic WMKA00177

TANK 5 YEAR WARRANTY

PARTS & LABOUR 2 YEAR WARRANTY

*Conditions apply: For full terms and conditions please contact Rheem or visit www.rheem.com.au/rheem/help/Warranties

TECHNICAL DATA

LAZER® BOILING WATER UNIT		LAZER® ECO		
WHITE POWDER COAT		70303W-AU	70305W-AU	70307W-AU
Capacity	Litres	3	5	7.5
Delivery – Initial	Litres	3.5	6	8.5
	Cups[1]	21	35	50
Recovery	L/hr	17.5	23	23
	Cups/hr[1]	103	135	135
Approx Weight Empty	kg	6	8	9
Approx Weight Full	kg	10	15	19
Minimum Water Pressure	kPa	50	50	50
Maximum Water Pressure	kPa	1000	1000	1000
Input	kW	1.8	2.4	2.4
Electrical Connection			supplied with 10 Amp 3 pin plug and flex	
Plumbing Connections			½" BSPM	
Product Dimensions				
A width of unit	mm	283	336	336
B depth of unit excluding tap	mm	160	192	192
C height of unit	mm	435	465	515
D depth of unit including tap	mm	280	312	312

[1] Cup size is 170ml.

LAZER® BOILING WATER UNIT		LAZER® COMMERCIAL				
WHITE POWDER COAT		70207W-AU	70210W-AU	70215W-AU	70225W-AU	70240W-AU
STAINLESS STEEL		70207S-AU	70210S-AU	70215S-AU	70225S-AU	70240S-AU
Capacity	Litres	7.5	10	15	25	40
Delivery – Initial	Litres	8.5	11	17	27	42
	Cups[1]	50	65	100	159	247
Recovery	L/hr	23	23	23	35	45
	Cups/hr[1]	135	135	135	206	265
Approx Weight Empty	kg	9	10	15	17	19
Approx Weight Full	kg	19	22	34	47	67
Minimum Water Pressure	kPa	50	50	75	75	100
Maximum Water Pressure	kPa	1000	1000	1000	1000	1000
Input	kW	2.4	2.4	2.4	3.6	4.6
Electrical Connection		Supplied with 10 Amp 3 Pin Plug and Flex			Hard wired	
Plumbing Connections		½" BSPM				
Product Dimensions						
A width of unit	mm	336	336	336	336	490
B depth of unit excluding tap	mm	192	192	299	299	340
C height of unit	mm	515	615	515	720	615
D depth of unit including tap	mm	312	312	419	419	460

[1] Cup size is 170ml.

WALL MOUNTED – BOILING WATER APPLIANCES

Boiling water extras

Lazer® Commercial – 7.5L

70207W-AU – White

70207S-AU – Stainless Steel

Max 185 cups p/hr[2]
Up to 50 people

Lazer® Commercial – 10L

70210W-AU – White

70210S-AU – Stainless Steel

Max 199 cups p/hr[2]
Up to 65 people

Lazer® Commercial – 15L

70215W-AU – White

70215S-AU – Stainless Steel

Max 235 cups p/hr[2]
Up to 90 people

Lazer® Commercial – 25L

70225W-AU – White

70225S-AU – Stainless Steel

Max 365 cups p/hr[2]
Up to 150 people

Lazer® Commercial – 40L

70240W-AU – White

70240S-AU – Stainless Steel

Max 512 cups p/hr[2]
Up to 250 people

Lazer® Eco – 3L

70303W-AU – White

Max 124 cups p/hr[2]
Up to 20 people

Lazer® Eco – 5L

70305W-AU – White

Max 170 cups p/hr[2]
Up to 35 people

Lazer® Eco – 7.5L

70307W-AU – White

Max 185 cups p/hr[2]
Up to 50 people

Increase Productivity

Gain cost advantages by replacing the staff room jug or kettle with a Rheem Boiling Water appliance. If you have over 20 staff and each person drinks 3 cups of tea or coffee a day, think of the time saved and increased productivity.

Retrofit Mounting Bracket

318961 - 3L Lazer® Eco

318962 - 5L Lazer® Eco

317327

5 micron remote filter
kit for Rheem Lazer® products

[2] Total of initial delivery and recovery per/hr (cup size 170ml).
[3] Based on Rheem flow rate of up to 11 litres/min versus a competitor flow rate of up to 8 litres/min.

Lazer® Eco (703 Series)

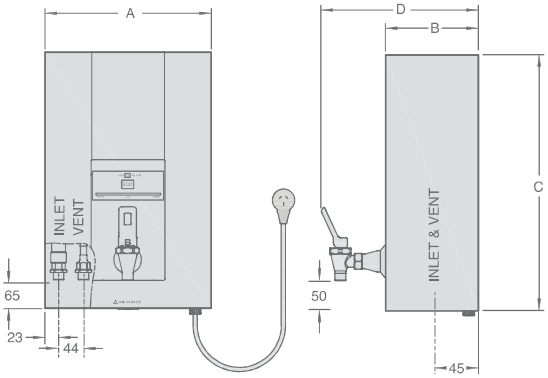
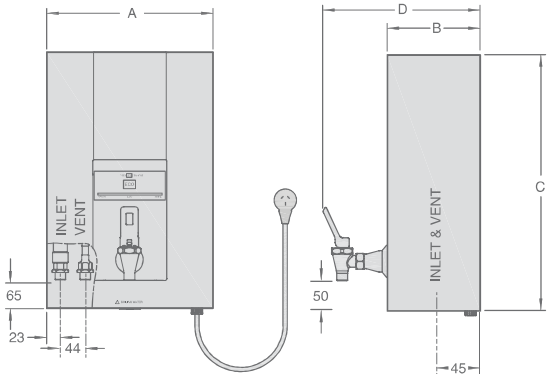
Lazer® Commercial (702 Series)