




TOTAL CAPACITY	920L
CAPACITY ABOVE UPPER FLANGE	297L
CAPACITY ABOVE LOWER FLANGE	758L
INLET / OUTLET CONNECTIONS	ISO 7.1 - RP 2"
SENSOR CONNECTIONS	ISO 7.1 - RP 1/2"
T&PR CONNECTION	NPT 1 1/4"
T&PR VALVE SETTING	515KPa (75 PSI)
MAX WORKING PRESSURE	600kPa
MAX SUPPLY PRESSURE	400kPa
TEST PRESSURE	900kPa
APPROXIMATE WEIGHT	115 Kg
INSULATION CLADDING	ALU or PVC /ABS TOP

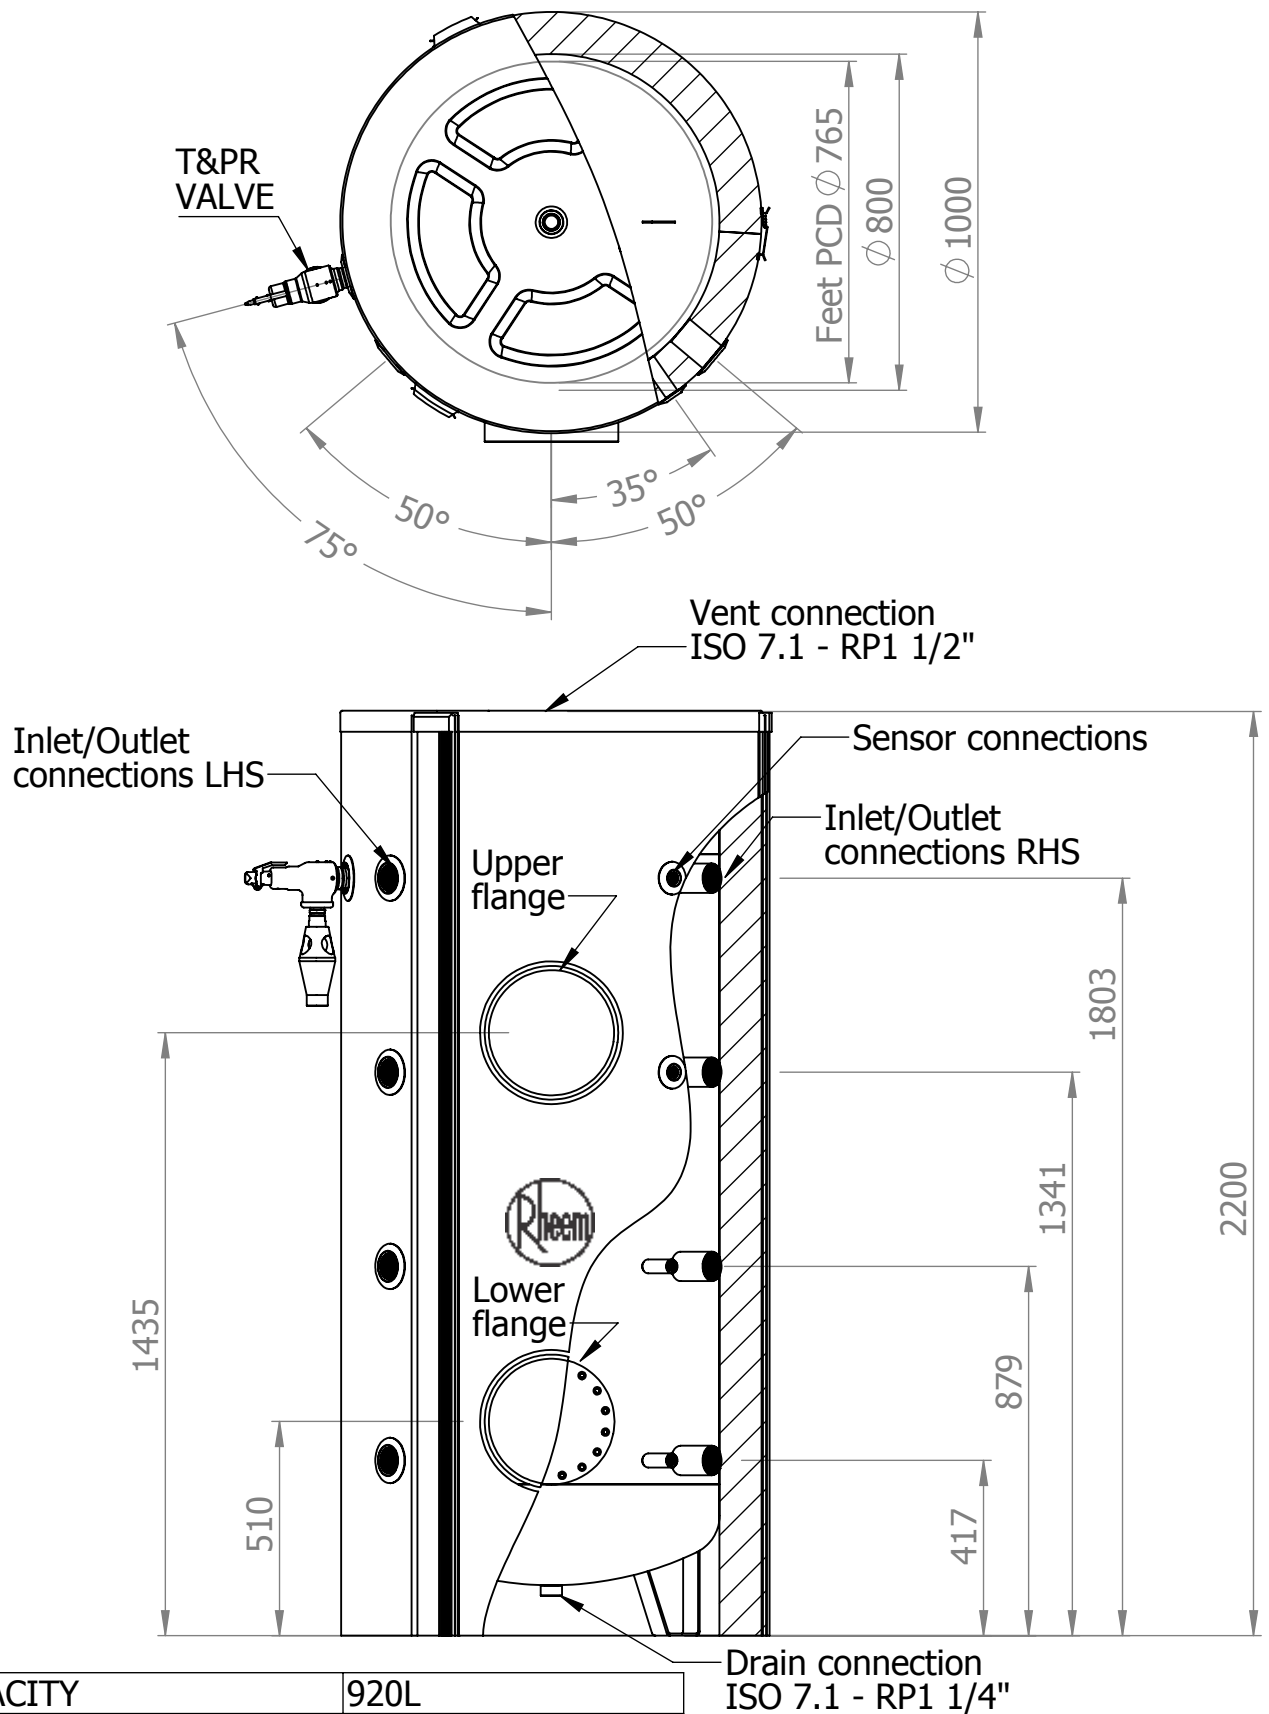

**COMMERCIAL
STORAGE CYLINDER**
RT1000C6ALU/RT1000C6PVC