




TOTAL CAPACITY	3820L
CAPACITY ABOVE UPPER FLANGE	1146L
CAPACITY ABOVE LOWER FLANGE	3200L
INLET / OUTLET CONNECTIONS	ISO 7.1 - RP 2"
SENSOR CONNECTIONS	ISO 7.1 - RP 1/2"
T&PR CONNECTION	NPT 1 1/4"
T&PR VALVE SETTING	515kPa (75 PSI)
MAX WORKING PRESSURE	600kPa
MAX SUPPLY PRESSURE	400kPa
TEST PRESSURE	900kPa
APPROXIMATE WEIGHT	455 Kg
INSULATION CLADDING	ALU or PVC /ABS TOP

Drain connection
ISO 7.1 - RP1 1/4"

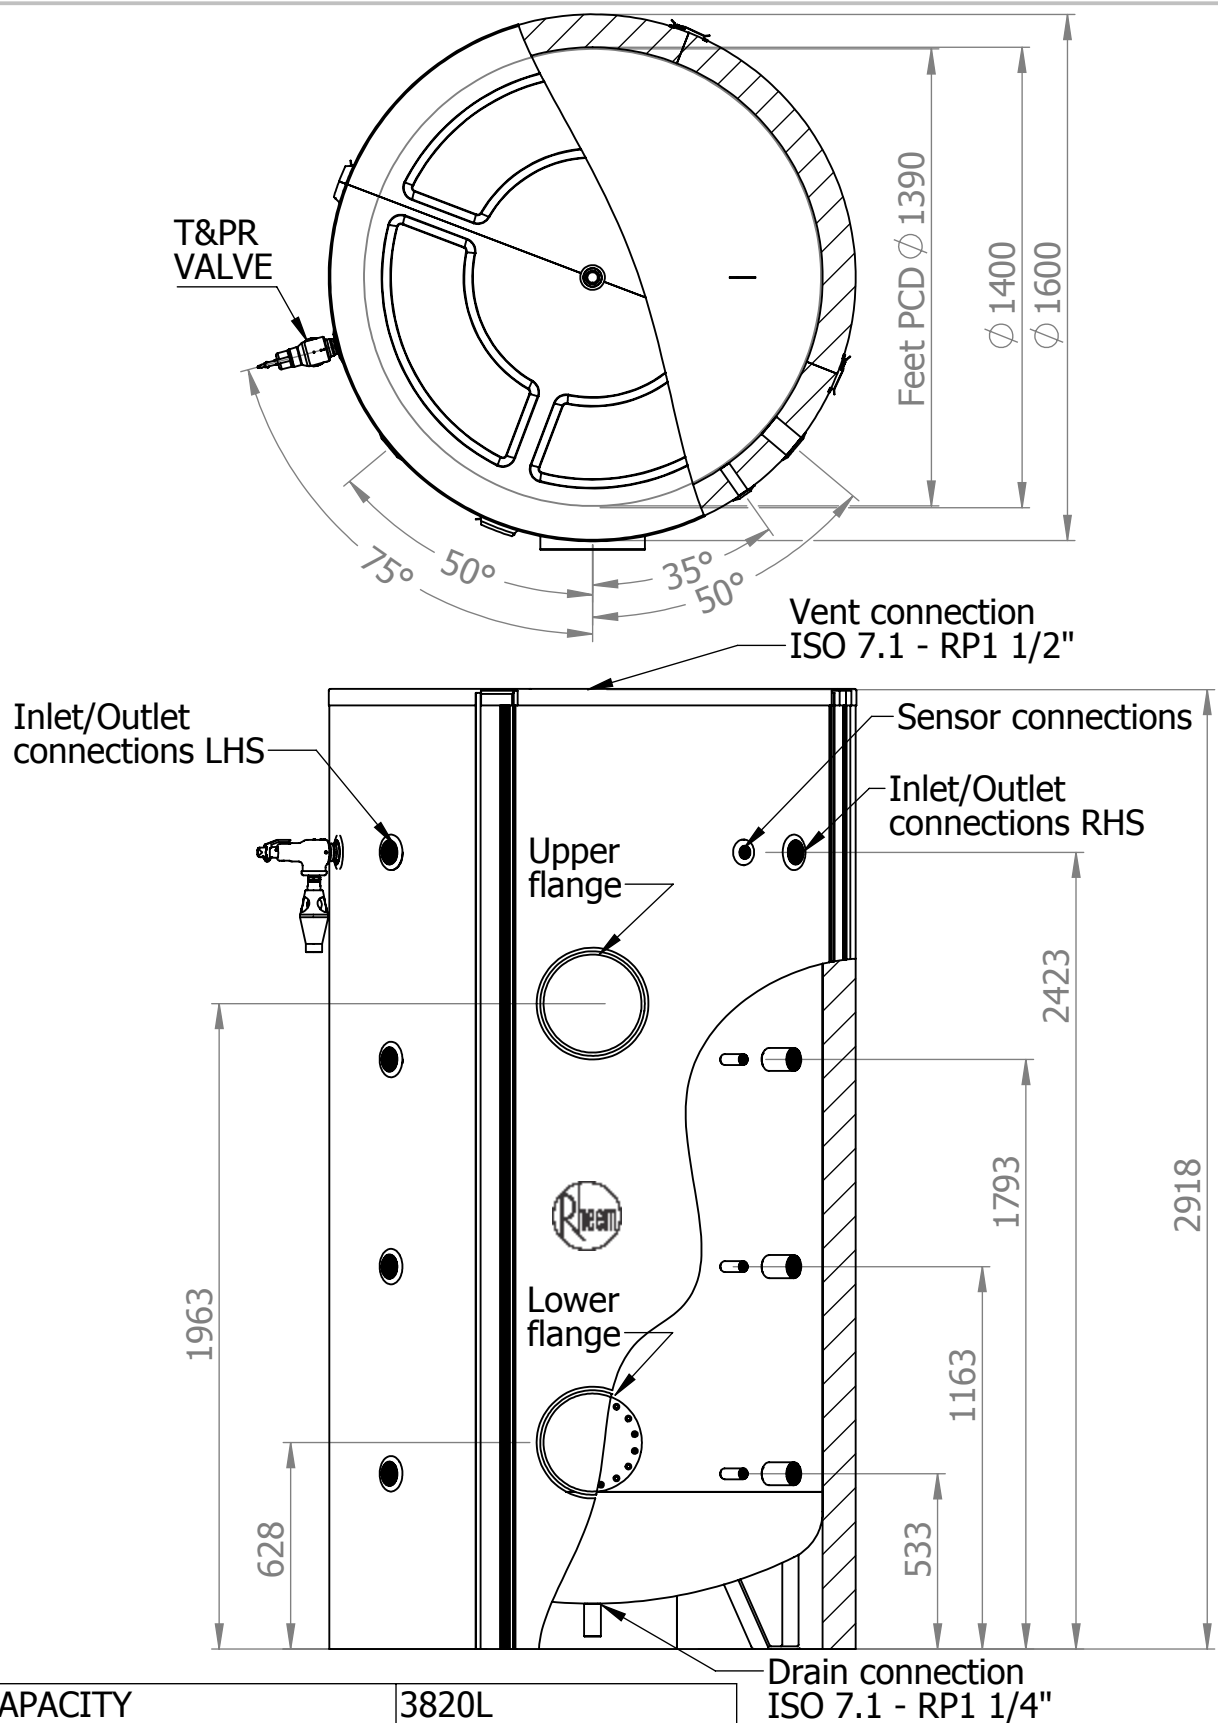

COMMERCIAL
STORAGE CYLINDER
RT4000C6ALU/RT4000C6PVC