




TOTAL CAPACITY	5180L
CAPACITY ABOVE UPPER FLANGE	1543L
CAPACITY ABOVE LOWER FLANGE	4274L
INLET / OUTLET CONNECTIONS	ISO 7.1 - RP 2"
SENSOR CONNECTIONS	ISO 7.1 - RP 1/2"
T&PR CONNECTION	NPT 1 1/4"
T&PR VALVE SETTING	515kPa (75 PSI)
MAX WORKING PRESSURE	600kPa
MAX SUPPLY PRESSURE	400kPa
TEST PRESSURE	900kPa
APPROXIMATE WEIGHT	535 Kg
INSULATION CLADDING	ALU or PVC /ABS TOP

Drain connection
ISO 7.1 - RP1 1/4"

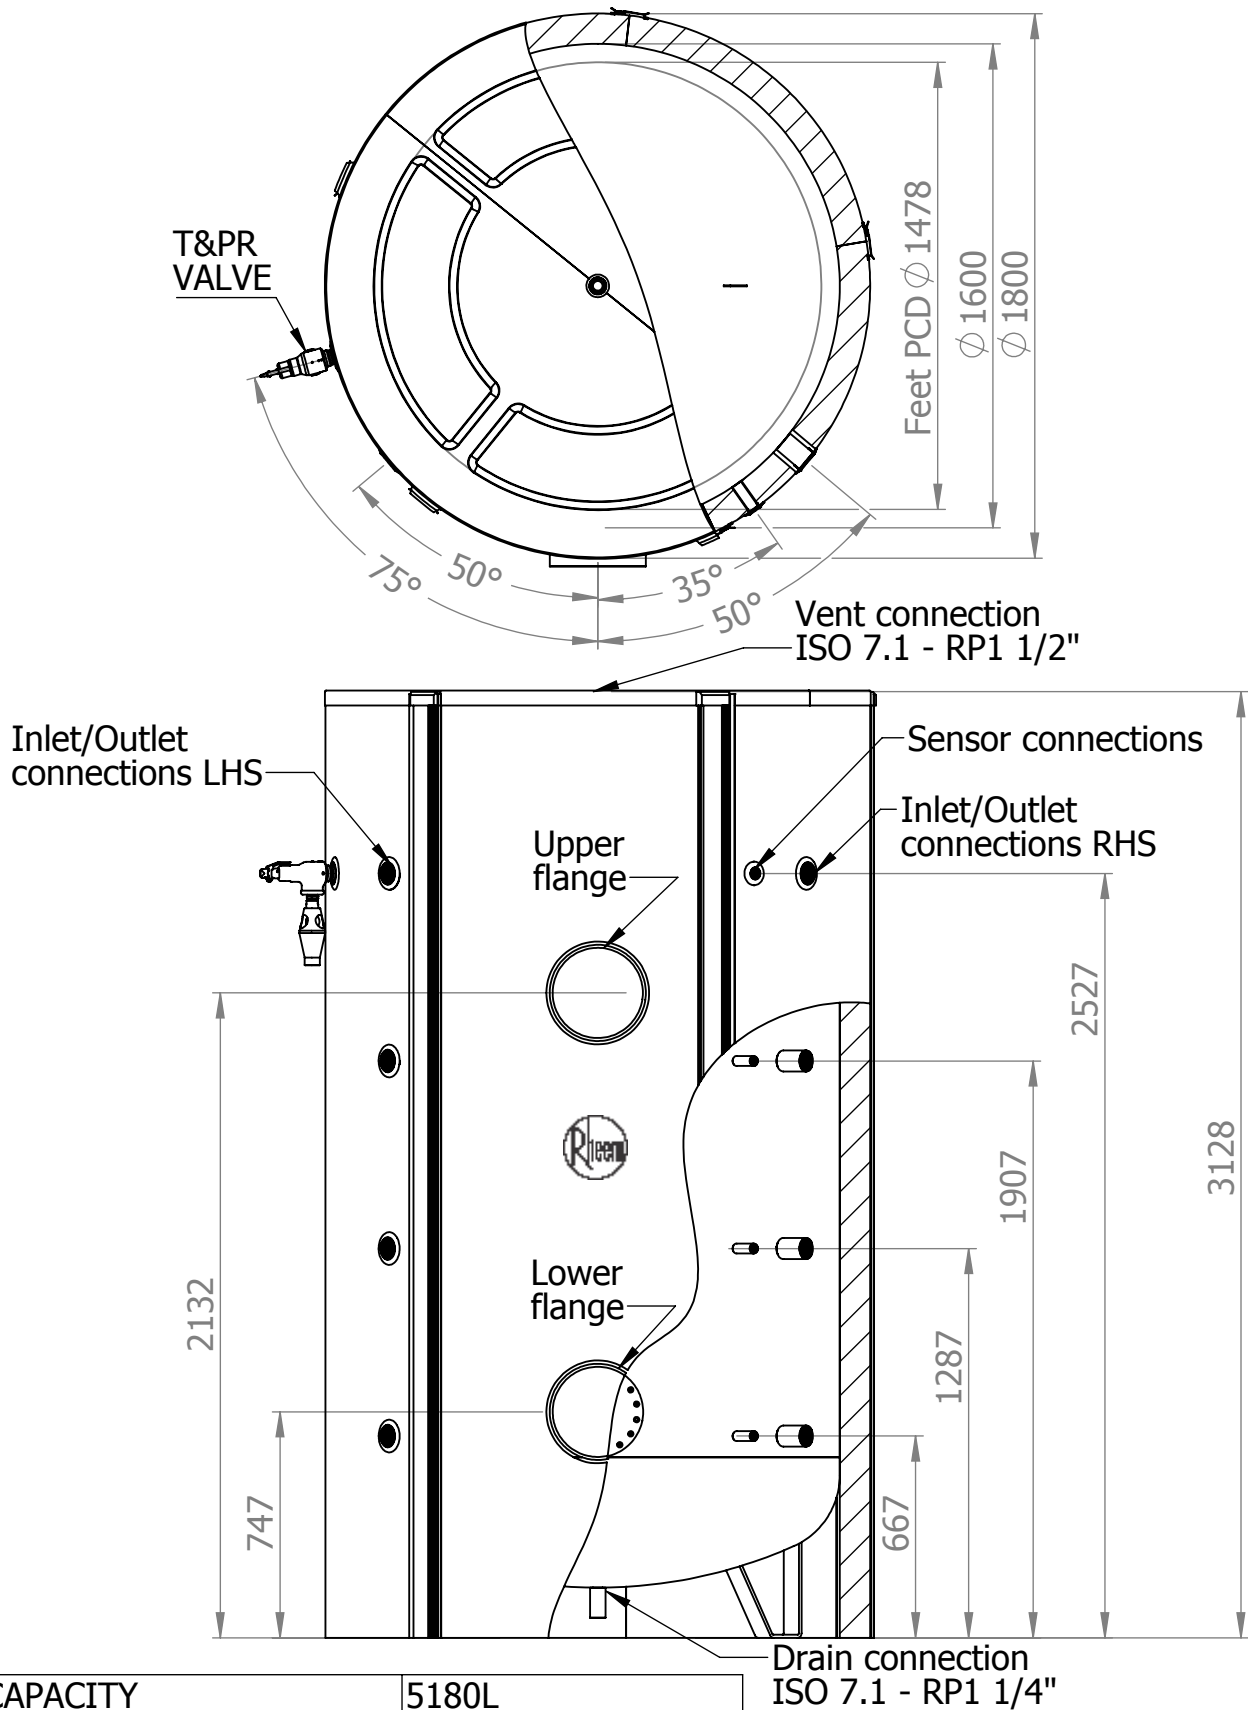

**COMMERCIAL
STORAGE CYLINDER**
RT5000C6ALU/RT5000C6PVC